


Description

3-piston alternating volumetric pumps for use on cleaning units and industrial systems. Pump body and cover in die-cast aluminium alloy. Rear cover with oil drain outlet, or incorporate oil sight glass. Pistons driven by crank-connecting rod mechanism. Pump shaft in pressed high-strength steel. Oversized friction bearings. Connecting rods in die-cast special low-friction zinc-aluminium alloy. Bronze connecting rods available. One-piece ceramic pistons. Pump head in pressed brass. Double gasket sealing system. Pump head internal components may be in different materials depending on application. Intake and delivery valves have plugs for easier maintenance. Various regulator valves and accessories can be connected to the pump head.

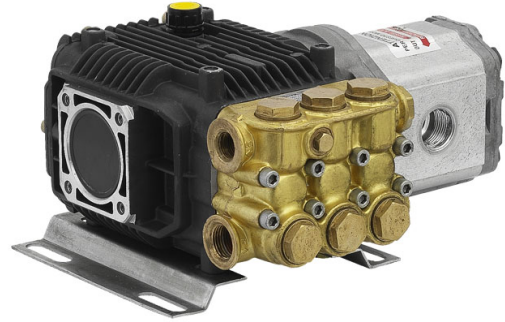


Details	Value
Category	Hydraulic Drive
Series	178 - XM
Pump type	HYD-XM 15.15
Versioning	HYD
ARCode	21603
Output (lt/min)	15
Output (gpm)	3.96
Pressure (bar)	150
Pressure (psi)	2200
Power (hp)	5,5
RPM	1450
Weight (kg)	6,7

USCITA / ENTRATA
SIDE INLET / OUTLET PORT

G 3/4"
(THD 16 mm deep)

USCITA / ENTRATA
SIDE INLET / OUTLET PORT

G 3/4"
(THD 16 mm deep)

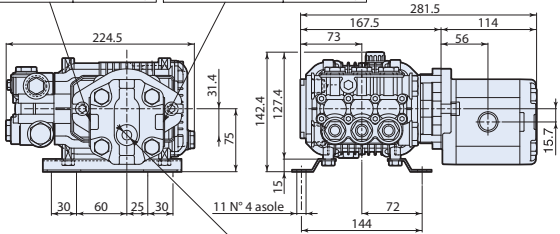

DRENAGGIO
DRAIN PORT

G 1/4"
(THD 13 mm deep)