

Flow-rate

up to
50 l/min
(up to 13 gpm)

Viscosity

up to
500 cSt

PIUSI
®

DISPENSERS

PUMPS

METERS

NOZZLE
METERS

NOZZLE



SPECIAL
EQUIPMENTSFLUID
MONITORING

ACCESSORIES

FILTERING



Viscomat 70 M

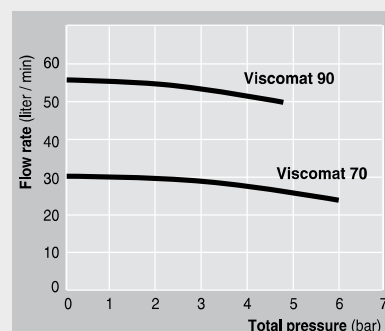

FEATURES

Vane rotors



Adjustable bypass valve



On/off switch



Flanged connection



ON REQUEST

PRODUCTS' RANGE TECHNICAL DATA

PRODUCTS RANGE - TECHNICAL DATA														
Code	Description	Fluids	Flow-rate		Pressure		Voltage				rpm	Inlet Outlet	Adjustable bypass valve	
		type	l/min	gpm	bar	psi	Singlephase motor V/Hz	Threephase motor V/Hz	Power Watt	Amp. max.				
VISCOMAT 70														
F0033490A	Viscomat 70 M. 230/50/60	BDO	25	7	6	85	230/50/60	-	1150	5,5	1450	1" BSP	YES	
F0033190A	Viscomat 70 T. 400/50	BDO	25	7	6	85	-	400/50-60	800/1100	2,3/3,1	1450/1700	1" BSP	YES	
VISCOMAT 90														
F00303M00	Viscomat 90 M. 230/50-60	BDO	50	13	5	71	230/50-60	-	1350/1600	6,5/7,8	1450/1700	1" BSP	NO	
000303000	Viscomat 90 T. 400/50-60	BDO	50	13	5	71	-	400/50-60	1350/1100	3,8/3	1450	1" BSP	YES	

Upon request it is available with different voltage and frequency

