

DISPENSERS

PIUSI THREE25

NEW



EN. PIUSI THREE25: The New AdBlue® Dispenser System for IBC tanks. Created to ensure optimum durability and efficiency, the Piusi Three25 administers a 32.5% urea solution that is protected by our AdBlue® 3D filter which prevents the contamination of your ADBLUE® and in turn allows for an increased life of the catalyst. The Piusi Three25 features a complete, turnkey system that gives users the ability to safely dispense their ADBLUE® and UREA fluids. Current market research and demands have encouraged 7 major technical and structural innovations to the PIUSI THREE25.


1. AdBlue® 3D Filter
2. Sturdy, stainless steel, plate with roll bar protection.
3. SEC connector for plastic couplings or new Piusi DEF Coupler (PDC) for common IBC tank steel coupling systems
4. New security lock bracket system
5. High Capacity Hose Holder and Practical Nozzle Holder
6. Crimped EPDM delivery hose
7. New SB325/SB325-meter automatic nozzle with break-away system and stainless steel spout.

ES. PIUSI THREE25: el nuevo sistema de suministro AdBlue® para los depósitos IBC. Para asegurar la duración y eficiencia del catalizador se debe suministrar el AdBlue® en un estado de pureza óptima (32,5% de Urea en una solución de agua desmineralizada). PIUSI con 7 importantes Innovaciones técnicas y estructurales responde a las exigencias del mercado a través del estudio y diseño del nuevo surtidor, PIUSI THREE25. Un producto ÚNICO en el mercado.

1. FILTRO 3D para AdBlue®
2. Estructura robusta de acero inoxidable con barra protectora
3. Conector SEC para sistemas de acoplamiento de plástico y como alternativa nuevo conector Piusi DEF Coupler (PDC) de acero para conexiones comunes al contenedor IBC
4. Nuevo clip de seguridad para soporte de bomba
5. Soporte de manguera grande y resistente y portapistola ergonómica
6. Tubo de ida engastado de EPDM
7. Nueva pistola automática SB325/SB325-meter con sistema de caño de acero inoxidable separable

PT. PIUSI THREE25: o novo sistema de fornecimento de AdBlue® para reservatórios IBC. Para garantir a duração e a eficiência do catalisador, é necessário administrar o AdBlue® na sua melhor pureza (32,5% de ureia na solução de água desmineralizada). PIUSI com 7 importantes inovações técnicas e estruturais respondeu às exigências do mercado com o estudo e a criação do novo distribuidor PIUSI THREE25. Um produto ÚNICO no mercado.

1. FILTRO 3D para AdBlue®
2. Estrutura rígida em aço inoxidável e proteção com barra de rolagem.
3. Conector SEC para conexão em plástico o novo conector Piusi DEF Coupler (PDC) para conexões comuns em aço para o reservatório IBC
4. Novo bloco de segurança para os suportes
5. Porta-tubo espaçoso e robusto e porta-pistola ergonômica
6. Tubo de descarga frisado em EPDM
7. Nueva pistola automática SB325/SB325-meter con sistema Break-Away y caño de acero inoxidable

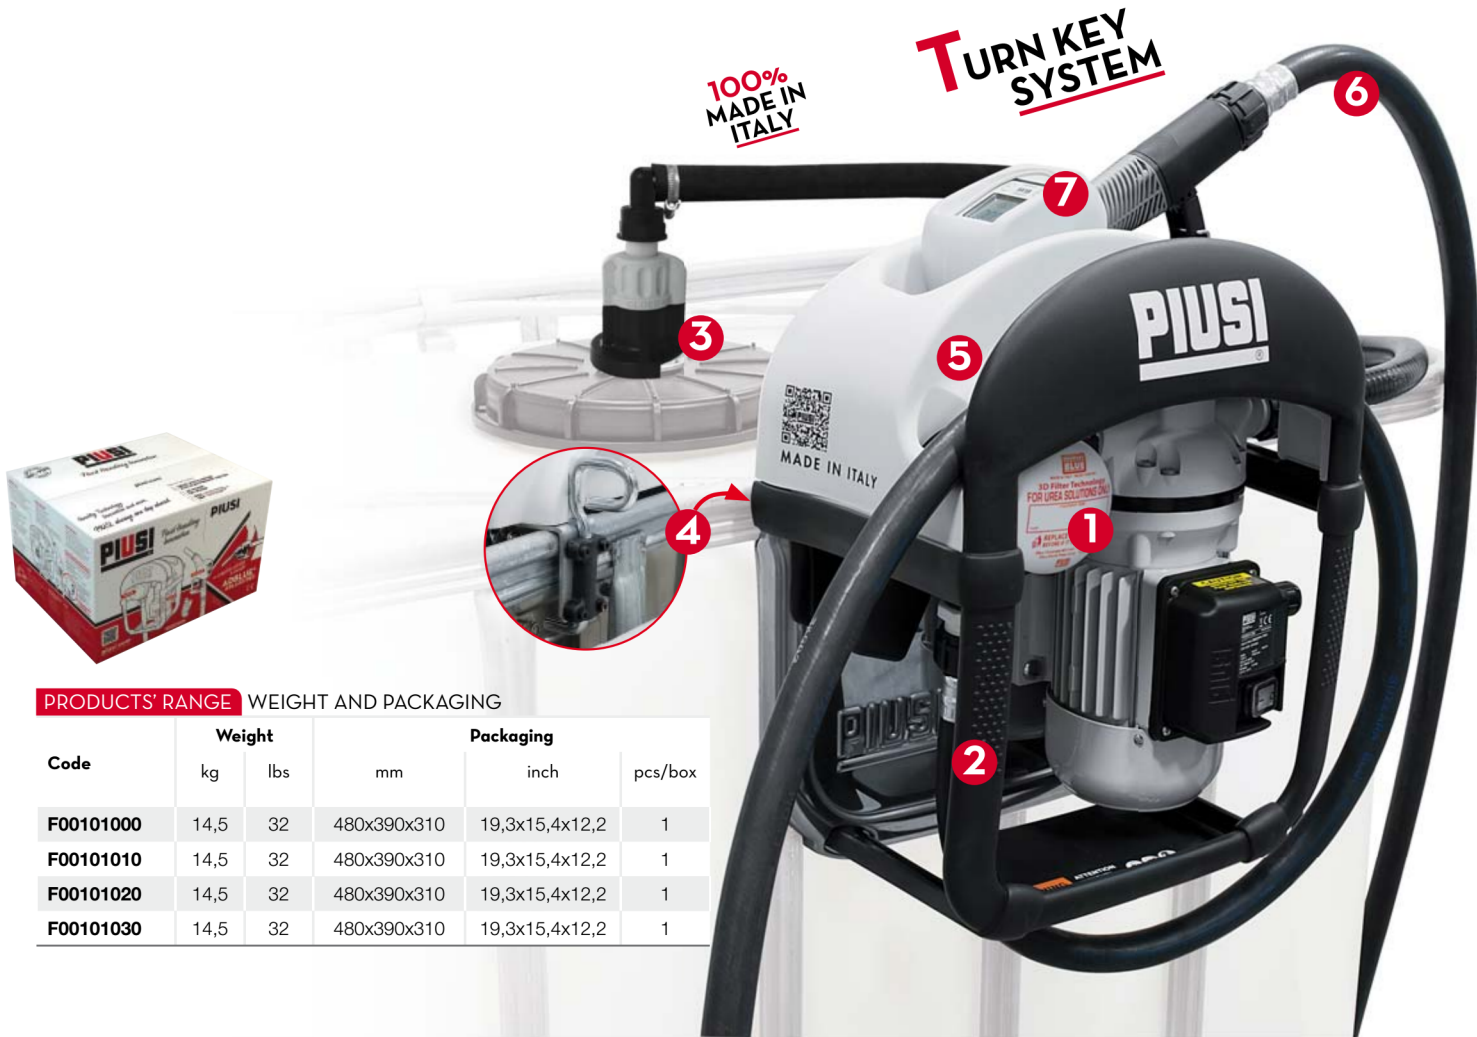

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
F00101000	14,5	32	480x390x310	19,3x15,4x12,2	1
F00101010	14,5	32	480x390x310	19,3x15,4x12,2	1
F00101020	14,5	32	480x390x310	19,3x15,4x12,2	1
F00101030	14,5	32	480x390x310	19,3x15,4x12,2	1

PIUSI THREE25
with SEC, K24 and SB325



PIUSI THREE25
with SEC and
SB325 Meter



PIUSI THREE25 with
EXTERNAL SUCTION



FEATURES

**AdBlue® long life
3D Filter**



Code F00611D10

SEC connection



**New Safety lock
bracket system**



**Large & Robust
Hose Holder**



**Sturdy Stainless
Steel Plate**



**Crimped EPDM
delivery hose**



**SB325
nozzle**



**SB325
nozzle meter**



AC Pump



K24 meter



Piusi DEF Coupler



For typical stainless
steel connector
Code F18910000

ON REQUEST

PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids type	Voltage			Meter mod.	Nozzle type	Suction	Hose length Ø 3/4"	On/Off switch
			AC V./Hz DC Volt	Power Watt	Amp. max.					
F00101000	Piusi Three25 + K24 + SB325 + SEC	U	230/50	400	1,95	K24	SB325	SEC	6 m	YES
F00101010	Piusi Three25 + SB325 Meter + SEC	U	230/50	400	1,95	YES	SB325 Meter	SEC	6 m	YES
F00101020	Piusi Three25 + K24 + SB325 + Ext. Suct.	U	230/50	400	1,95	K24	SB325	BOTTOM	6 m	YES
F00101030	Piusi Three25 + SB325 Meter + Ext. Suct.	U	230/50	400	1,95	YES	SB325 Meter	BOTTOM	6 m	YES

Available with different voltage 60 Hz frequency